

The UNIVO HT Series AC LVDTs are specially designed for Extreme High Temperature applications demanding the highest levels of reliability while performing in the rugged environments that are required for industrial equipment. These transducers are constructed of special high temperature materials, allowing them to operate up to 1000°F (538°C). The HT Series provide a ratiometric output, allowing their secondary difference voltages to be divided by their sum. This cancels thermal error, providing extremely low thermal sensitivity over a wide temperature range. These HT Series are available from  $\pm 0.500$  inch ( $\pm 12.7$  mm) to  $\pm 1.0$  inch ( $\pm 25.4$  mm) and offer high sensitivity, high resolution and excellent linearity.

## Features

- 1000°F operating temperature
- 1 inch diameter stainless steel housing
- Ratiometric output for reduced thermal error
- Linearity  $\pm 0.5\%$  of Full Range Typical
- Through-bore design
- Choice of imperial or metric threaded core
- Standard and custom models available

## Applications

- Power Generation
- Engine Control System
- Furnace
- Autoclave

## Mechanical and Electrical Specifications

**Nominal Range (Inches)**  $\pm 1.0$

**Nominal Range (mm)**  $\pm 25.4$

**Input Voltage** 3 Vrms (Nominal)

**Input Frequency** 400Hz to 10KHz

**Sensitivity (mV/V/.001 Inch)** 0.25

**Sensitivity (mV/V/mm)** 9.78

**Primary Impedance (  $\Omega$  )** 400

**Linearity**  $\pm 0.5\%$  Full Range Typical

**Null Voltage** 0.5% Full Range

**Hysteresis**  $<0.01\%$  of Full Range Typical

**Repeatability**  $<0.01\%$  of Full Range Typical

**Body Weight ( grams)** 300

**Core Weight ( grams )** 0.5



## Environmental Specifications

**Operating Temperature** -65°F to 1000° F (-55°C to 538°C)

**Thermal Coefficient** 25 ppm/°F (45 ppm/°C) of Full Range

**Humidity:** 90% R.H., 240 Hours

**Shock Survival:** 1000 g, 11 ms

**Vibration:** 20 g to 2 KHz




**Univo Sensor Solution, LLC**

Pennsauken, NJ 08110-1541 USA

[www.univotec.com](http://www.univotec.com)

## Dimensions and Wiring

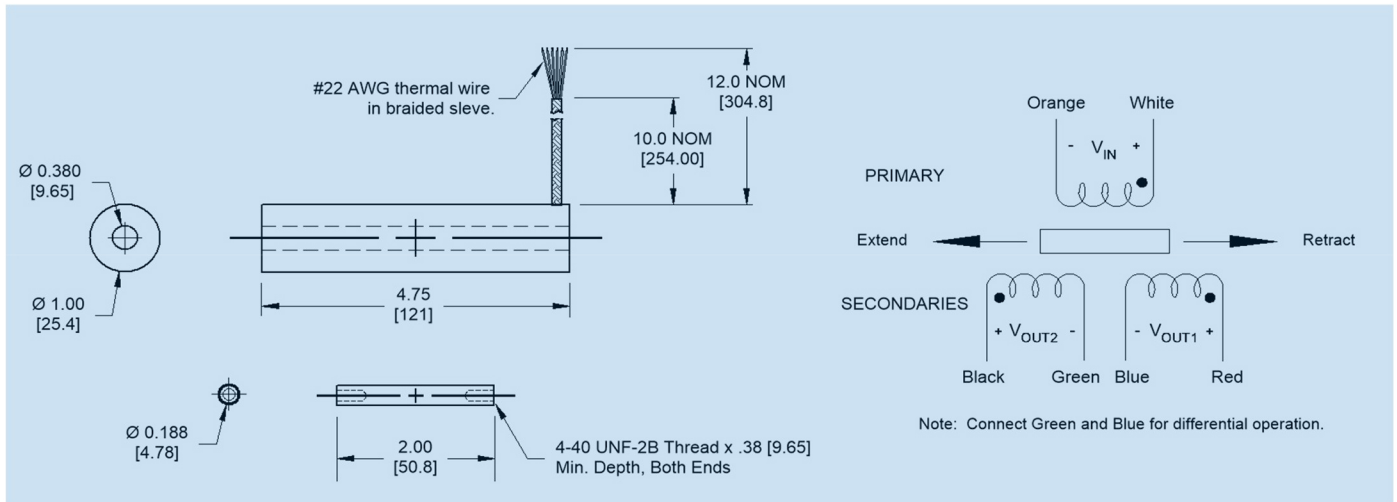

## Ordering Info

<b>UHT-1000</b> Extreme Temperature LVDT	<b>1000</b> — <b>xxx</b>
Range 1 inch	Options — M: Metric Threads [none]: Standard Product

### Notes:

- Electrical specifications measured at 3KHz excitation frequency.
- Additional options and displacements are available. Please consult factory for custom designs.
- Specifications subject to change.

## Warranty

UNIVO products are warrantied against defective materials and workmanship for a period of one year from the date of delivery to the original purchaser. UNIVO accepts no liability for damages in the misuse of our products.



**Univo Sensor Solution, LLC**

Pennsauken, NJ 08110-1541 USA

[www.univotec.com](http://www.univotec.com)