

The UNIVO GE Series Gage Head LVDTs are designed to work with DC voltage, and have excellent linearity, high sensitivity and high resolution. They permit highly accurate readout and recording of an output signal directly without auxiliary signal conditioning electronics. These GE Series spring-loaded LVDTs are designed for a wide range of position measurement and dimensional gaging applications and available in ranges of 0.10 inch (2.5mm) to 4 inches (100mm).

Features

- Spring loaded probe
- Welded 3/4 inch hermetically sealed steel housing
- Measurement ranges from ± 0.10 to ± 4 inches
- Linearity $\pm 0.15\%$ of Full Range Typical
- Shock and vibration tolerant
- Choice of probe contact tips
- Standard and custom models available

Applications

- Pinch and roller alignment
- Dimensional gaging
- Factory automation
- Materials testing
- Packaging equipment
- TIR measurements

Electrical Specifications

Input Power:	24VDC, 25mA Nominal
Full Scale Output:	0 to 10VDC
Linearity:	$< \pm 0.15\%$ Full Range Typical
Hysteresis:	$< 0.01\%$ of Full of FSO Typical
Repeatability:	$< 0.01\%$ of Full Range Typical



Environmental Specifications

Operating Temperature:	0°F to 185°F (-20°C to 85°C)
Thermal Coefficient:	$< -0.014\%/^{\circ}\text{F}$ ($< -0.025\%/^{\circ}\text{C}$) of Full Range
Humidity:	90% R.H., 240 of FSO Typical
Shock Survival:	1000 g, 11 ms
Vibration:	20 g to 2 KHz

Materials Specifications

Housing:	Corrosion-resistant nickel-iron alloy
Core:	Hi-permeability nickel-iron alloy
Magnet Wire:	Film insulated copper
Connector:	PT02A-10-6P
Probe:	AGD #9 contact tip

**Univo Sensor Solution, LLC**


Pennsauken, NJ 08110-1541 USA

www.univotec.com

Specifications

Model	UGE-750	UGE-750	UGE-750	UGE-750	UGE-750	UGE-750
Parameter	100	250	500	1000	2000	4000
Nominal Range (inches)	0.10	0.25	0.50	1.0	2.0	4.0
Nominal Range (mm)	2.5	6.3	12.5	25.0	50.0	100.0
Scale Factor (V/inch)	100	40	20	10	5.0	2.5
Scale Factor V/mm	4.0	1.6	0.8	0.4	0.2	0.1
Dimension "A" (inches)	5.45	6.05	6.85	11.35	13.80	21.75
Dimension "B" (inches)	4.35	5.00	5.70	9.85	11.35	17.19
Dimension "C" (inches)	2.80	3.45	4.15	6.75	8.15	11.71
Body Weight (ounces)	3.0	3.5	4.1	6.5	6.9	10.5
Body Weight (grams)	83	101	171	182	298	296

Dimensions and Wiring

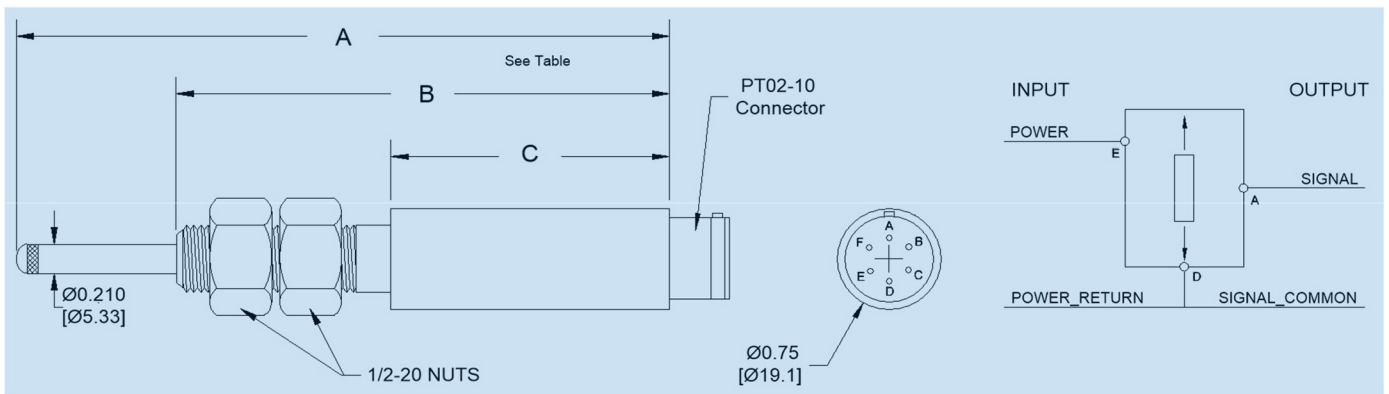

Ordering Info



Notes:

- Electrical specifications measured at 3KHz excitation frequency.
- Additional options and alternate contact tips are available. Please consult factory for custom designs.
- Specifications subject to change.

Warranty

UNIVO products are warranted against defective materials and workmanship for a period of one year from the date of delivery to the original purchaser. UNIVO accepts no liability for damages in the misuse of our products.



Univo Sensor Solution, LLC

Pennsauken, NJ 08110-1541 USA

www.univotec.com